EZPix_f System



Choose to operate EZPix as a fully automatic gantry system, or in a semi-automatic mode with the operator pendant, as shown above. Either way, EZPix will increase your throughput while virtually eliminating ergonomic issues.

different products. Imagine the flexibility this system will

give your distribution center to meet changing market demands.

Benefits

- Handles Layers up to 400 lbs.
- Encompass up to 12 Pallet **Positions**
- Highly Scaleable
- Highly Reliable
- Operates Fully Automatic or Semi-Automatic
- Low Maintenance Requirements
- Eliminate Ergonomic Issues
- Increase Throughput
- Easy to Operate and Maintain
- Low Profile Design



www.ami-rs.com

General Specifications


11	Model	EZPix System
Item		0 A. i
Controlled Axis		2 Axis
Payload		400 lbs.
Repetitive Positioning Accuracy		+/- 1/8"
Load	Height	70"
	Width	44"
	Length	52"
Range	Vertical	74"
	Horizontal	over 60 feet
Ambient Conditions	Temperature	35° - 135° F
	Humidity	5 to 90% RH (non condensing)
	Others	Free from corrosive gases or liquids
		Clean and Dry
		Free from excessive electrical noise
		Adequate electrical ground source



1207A Belmar Drive Belcamp, Maryland 21017

Tel: 410-679-7902 Fax: 410-679-7903

Website: www.ami-rs.com Email: sales@ami-rs.com Standard EZPix System

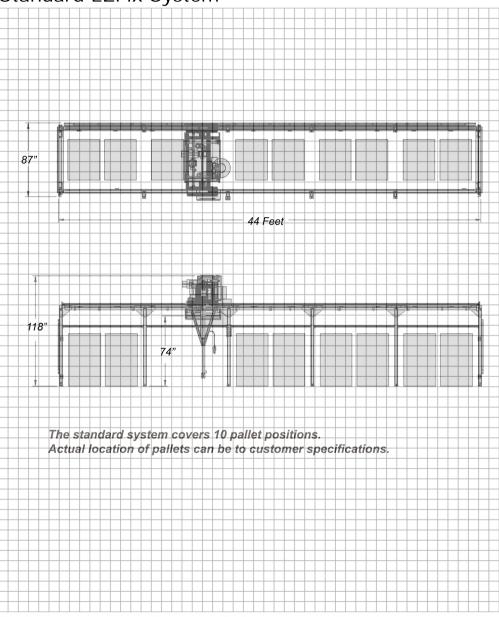

The dimensions, descriptions, illustrations and other particulars in this brochure are provided in good faith and are for information purposes only. No guarantee or warranty is given or implied by Automated Motion Inc. Photographs are for illustration only and may be shown with guards removed to highlight details or features.

Copyright © 2004 Automated Motion Incorporated.